

P

SINGLE TUBE FLOW METERS

INTERCHANGEABLE

Designed for low flow rates, the **Model P** flow meter is a precision instrument embodying the inherent simplicity, versatility and economy of the classical rotameter. It is particularly suitable for metering carrier gases in chromatography, indicating and controlling gases in manufacturing processes, liquid and gas measurement in laboratories, pilot plants, flow and level indicating, etc.

Shipped completely assembled, flow meters include standard mounting fittings in a choice of materials, side plates, thick protective magnifying front shield and back plate, optional built-in control valve, and flow tubes selected from the Flow Capacities tables. Panel mounting style is convertible to bench mounting through the use of the optional acrylic tripod. The tripod has a built-in spirit leveler and leveling screws.

For multiple tube meters see pages 7 and 8.

design features

- ✓ Rib-guided or fluted metering tubes facilitate stable, accurate readings.
- ✓ Magnifier lens in front shield to enhance reading resolution.
- ✓ Interchangeability of flow tubes and floats.
- ✓ Ease of installation and exchange of flow tubes.
- ✓ "Non-rotating" adapter feature - glass flow tubes are prevented from turning during the tightening phase of the assembly procedure.
- ✓ OPTIGRAD™ scales minimize parallax and eye fatigue.
- ✓ Chemical compatibility.
- ✓ Simple means of panel mounting.

150 mm Meter with CV™ Valve



65 mm Meter with MFV™ Valve

BUILT-IN VALVES

Meters are available with built-in needle valves (CV™), high precision metering valves (MFV™) with “non-rising stems”, or with no valves. The higher cost of MFV™ valves is justified whenever high sensitivity control and resolution are desirable particularly in conjunction with metering tubes of very low flow rates.


Generally, for gas metering it is recommended that valves are positioned at inlets (bottom) for liquids valves may be positioned either at inlets or outlets (top). For vacuum services, valves must be mounted at outlets. If unspecified at the time of ordering, meters will be shipped with valves mounted at the inlets.

Panel mounting is convertible to bench mounting through the use of an optional acrylic tripod base with spirit leveler (catalog No. TP1).

| SPECIFICATIONS | |
|-------------------------------|--|
| STANDARD ACCURACY | ±2% FS (mm scales). ±5% FS (direct reading scales). |
| CALIBRATED ACCURACY | ±1% FS. |
| REPEATABILITY | ±0.25%. |
| USEFUL FLOW RANGE | 10:1 minimum with one float and better than 20:1 with combination of two floats installed in meters. |
| MAXIMUM OPERATING PRESSURE | 200 psig/13.8 bars. |
| MAXIMUM OPERATING TEMPERATURE | 250°F/ 121°C. |

| **MATERIALS OF CONSTRUCTION | |
|--|--|
| FLOW TUBES | Heavy walled borosilicate glass. |
| FLOATS | Glass, Sapphire, 316 Stainless Steel, Carboly and Tantalum. |
| CHOICE OF MOUNTING FITTINGS IN CONTACT WITH FLUIDS | a) Aluminum, black anodized. b) Brass, chrome plated. c) 316 stainless steel. |
| SIDE PANELS | Aluminum, black anodized. |
| FRONT SHIELD | Lexan® with longitudinal magnifier lens for enhanced reading resolution. |
| BACK PLATE | 1/8" thick white acrylics. |
| O-RINGS AND PACKING | Buna-N® o-rings in aluminum/ brass model. Viton® o-rings in stainless steel meters. <i>OPTIONAL</i> Viton® PTFE Kalrez® and EPR. |
| CONNECTIONS | 1/8" NPT female inlet and outlet connections. <i>OPTIONAL</i> 1/4" FNPT, hose and compression fittings are available. |

Select flow tube consistent with requirements from flow capacity tables 6 to 23 (page 37 to 42).

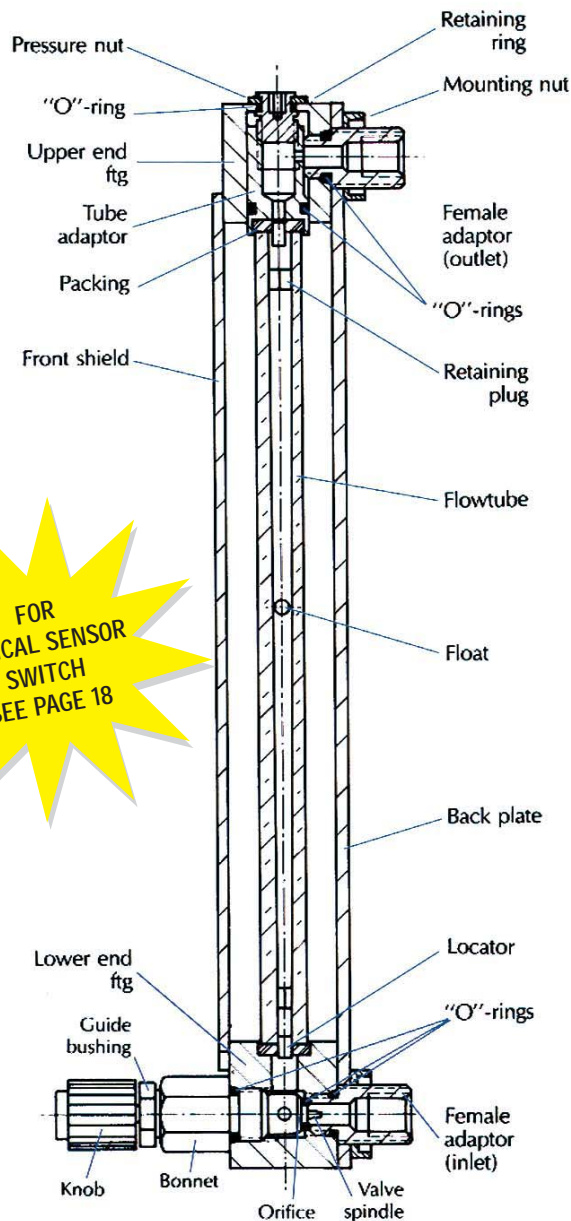

Assorted flow tubes may be used in conjunction with a single mounting frame, an apparent benefit in many laboratory applications.

Ordering information see page 9.
Dimensional information see page 8.

***The selection of materials of construction, is the responsibility of the customer. The company accepts no liability.*



ORDERING INFORMATION MODEL P METERS

EXAMPLE

| | | |
|----------|----------------|--------------------------------------|
| P | P STYLE METERS | |
| | CODE | NUMBER OF CHANNELS |
| | 1 | SINGLE CHANNEL (ONE TUBE) |
| | 2 | TWO CHANNEL METER (TWO TUBES) |
| | 3 | THREE CHANNEL METER (THREE TUBES) |
| | 4 | FOUR CHANNEL METER (FOUR TUBES) |
| | 5 | FIVE CHANNEL METER (FIVE TUBES) |
| | 6 | SIX CHANNEL METER (SIX TUBES) |
| | CODE | SIZE |
| | 6 | 65 mm |
| | 1 | 150 mm |
| | CODE | MATERIAL |
| | A | ALUMINUM |
| | B | BRASS |
| | S | STAINLESS STEEL |
| | CODE | VALVE POSITION |
| | 1 | MFV (HIGH PRECISION) INLET |
| | 3 | NO VALVE |
| | 4 | CV (STANDARD CARTRIDGE) INLET |
| | 5 | MFV (HIGH PRECISION) OUTLET |
| | 6 | CV (STANDARD CARTRIDGE) OUTLET |
| | CODE | SEALS |
| | V | VITON® STANDARD ON STAINLESS METERS |
| | B | BUNA® STANDARD ON BRASS AND ALUMINUM |
| | E | EPR |
| | T | PTFE / KALREZ® |
| | CODE | FITTINGS |
| | A | 1/8" FNPT (STANDARD) |
| | B | 1/4" FNPT |
| | C | 1/8" HOSE NIPPLE |
| | D | 1/4" HOSE NIPPLE |
| | E | 1/8" COMPRESSION |
| | F | 1/4" COMPRESSION |
| | H | VCR FITTINGS |
| | CODE | MANIFOLD |
| | 0 | NONE (STANDARD FOR SINGLE CHANNEL) |
| | 1 | BOTTOM |
| | 2 | TOP |

| | | | | | | | | | | |
|----------|--|--|--|--|---|--|--|--|--|-------------|
| P | | | | | — | | | | | TUBE |
|----------|--|--|--|--|---|--|--|--|--|-------------|

Optional Accessories

TP1-Tripod for single channel meter.
 TP2-Tripod for 2, 4 and 6 isolated channels or manifolding at top.
 TP3-Tripod for 3 and 5 isolated channels or manifolding at bottom.
 TP5-Tripod for 3 single tube meters.

Select tube from the following tables:

Tables 6 to 23. Pages 37 to 42.